

240Hz

901 ST

SMALL AND EFFICIENT



INPUT

Power supply	[50Hz Three-phases+N+GND]	400V a.c.
Pneumatic power (min.)	[bar]	5
Max power required (peak load)	[kW]	14

OUTPUT

Upper tool weight (up to)	[up to kg]	50
Generator power	[kW]	16
Vibration frequency	[Hz]	220-240
Vibration amplitude	[mm]	0,4-1,8
PP equivalent welding area	[cm ²]	300
Size of the area detected in the test environment		

MECHANICAL DATA

Vibration plate dimensions	[mm]	880×520
Lifting table stroke	[mm]	500
Lifting table maximum speed	[mm/s]	250
Clamp net force (Gross)	[kN]	15 (19)
Lifting table dimensions	[mm]	1020×540
Lifting table height	[mm]	1000
Front-door span	[mm]	1050×750
Upper door threshold	[mm]	1755
Clearance between planes	[mm]	700
Overall dimensions	[W×D×H mm]	2230×1210×2170
Total weight	[kg]	3300
Hydraulic oil	[L/ISO32]	55
Machine Type		 ¹

¹ Mobile table movement performed with hydraulic control unit in a dedicated area.

² Thanks to our third-generation controller we have been able to eliminate the necessity of the auto-tuning cycle: the machine can adapt to the vibration frequency in real-time following the mechanical reactions of the vibrating system. Therefore, the outcome is a neater and more efficient vibration than the one obtained employing second-generation old systems.

The machine can be customized with some standard options, contact us for a personalized offer.

CONTROL

PLC Control	Siemens S7 - CPU
HMI	Touch panel 12"
Vibration frequency tuning ²	Continuous REALTIME
Welding steps	[pressure, amplitude] 8
Welding depth sensitivity	[mm] 0,01
Work settings memory	63 automatic equipment
Type of communication	Profinet/Profibus
The digital generator ensures very short swing on/off vibration phases (50ms)	

REFERENCES


Work outcome definition	Automatic (good/reject)
Work outcome printer	Custom Plus
Vacuum circuit	1 (opt. up to 3)
Pneumatic valves movements	2 (opt. up to 5)
Remote-assistance	Optional
Automatic rear door (for rear loading/unloading)	Optional
Noise level	[dBA EN ISO 11202] ≤ 80
Peak values can be higher for short periods depending on the application.	

MORE INFO






V I B R A T I O N E W E L D E R

UPPER PLATE

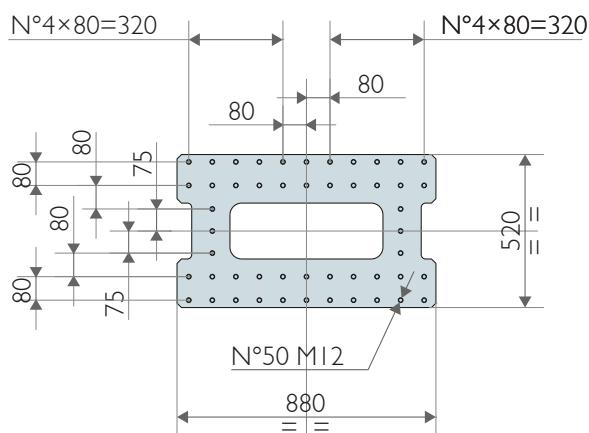

LOWER PLATE

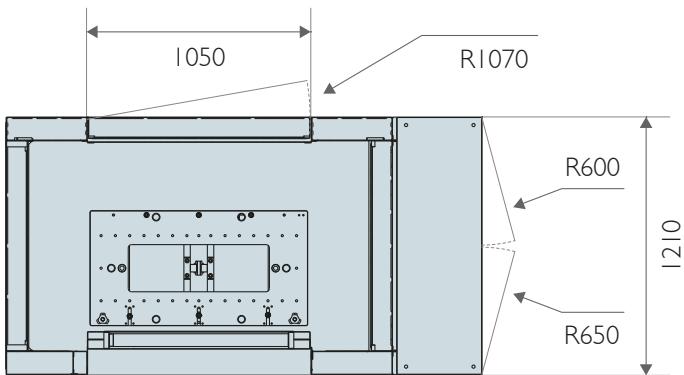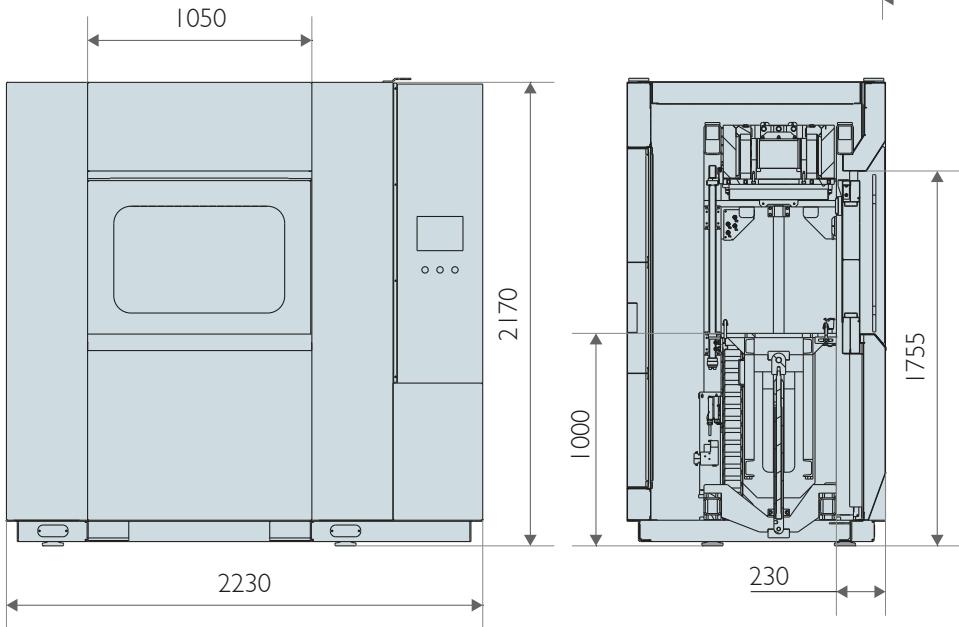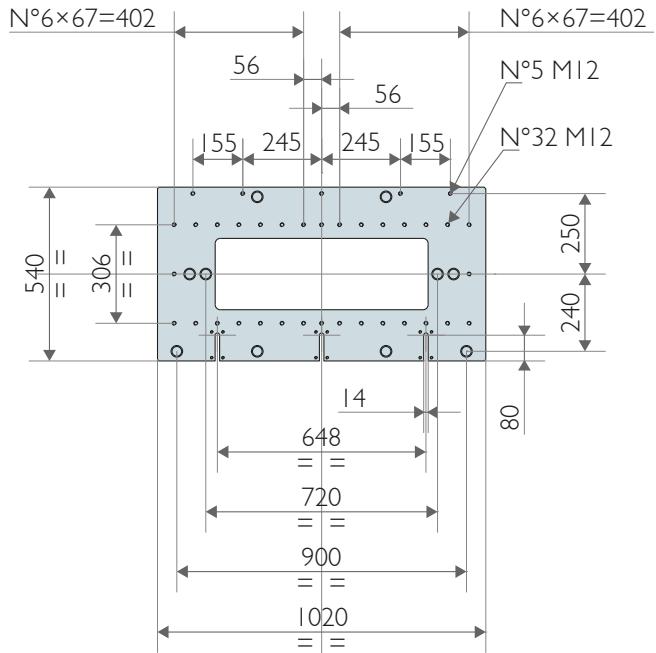

901 ST